



installation manual for Audi -Q5

01932 800800



Remove with a plastic lever, the original display cover protection.



Disconnect the hazard button connector



Remove the original display with a Torx screwdriver.




Disconnect the display connector



Remove with the same plastic lever, the central channel panel.



Place the loudspeaker into the central channel housing.

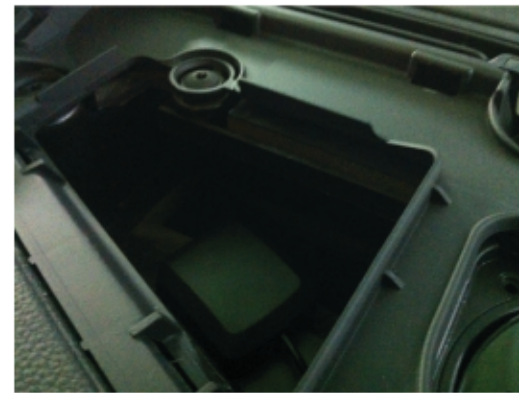

Place the GPS antenna as shown in the picture




Replace the central channel panel



Connect the original display connector to NAViPAD connector



Connect the loudspeaker

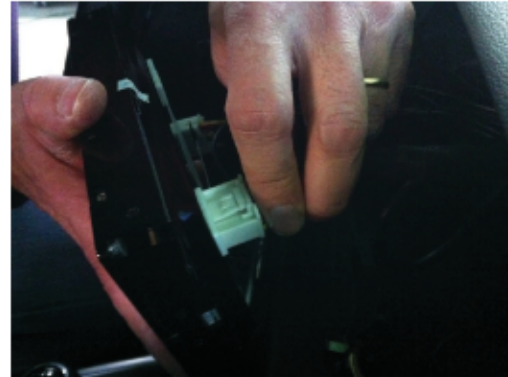

Connect both the new display connectors




Connect the GPS antenna



Before fixing the NAViPAD display, line it up.



Fix the NAViPAD display

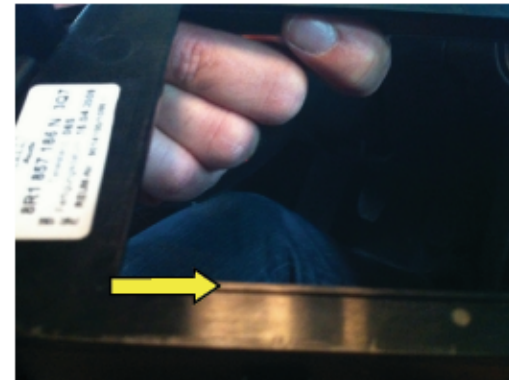

In AUDI Q5 cars, it will be necessary to file the inner plastic edge (back side of display cover) leaning on NAViPAD screen.



Fix the original display cover protection



Turn the ignition on, the original car menu will be displayed



Touch the screen, now the NAViPAD menu will be displayed



If necessary, adjust and centre the screen from NAViPAD menu.



Select GPS on NAViPAD menu

01932 800 800



Navigation software will be uploaded in 15/20 seconds



From NAViPAD menu will be possible to set GPS functions and...



.....HAVE A NICE TRIP



01932 800800